




## Passive Ceramic Patch Antenna

- Dual-band, Quadri-feed
- Embedded passive antennas for GNSS
- Technology: GPS L1/L5; Beidou B1/B2
- Double stack
- Pin type
- Applications in navigation, automotive, tracking, monitoring, security etc.

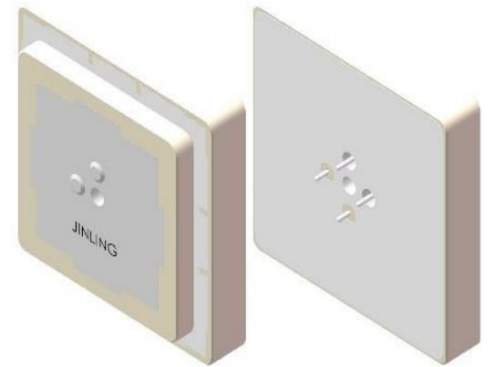

Item	Performance Specifications
Center Frequency	1187MHz;1575MHz
Polarization	RHCP
Impedance	50 $\Omega$
Axial Ratio	$\leq 2.0\text{dB}; \leq 2.0\text{dB}$
Return Loss	$\leq -10\text{dB}; \leq -10\text{dB}$
Peak Gain @Zenith	4.5dBic;4.5dBic

## S-Parameter

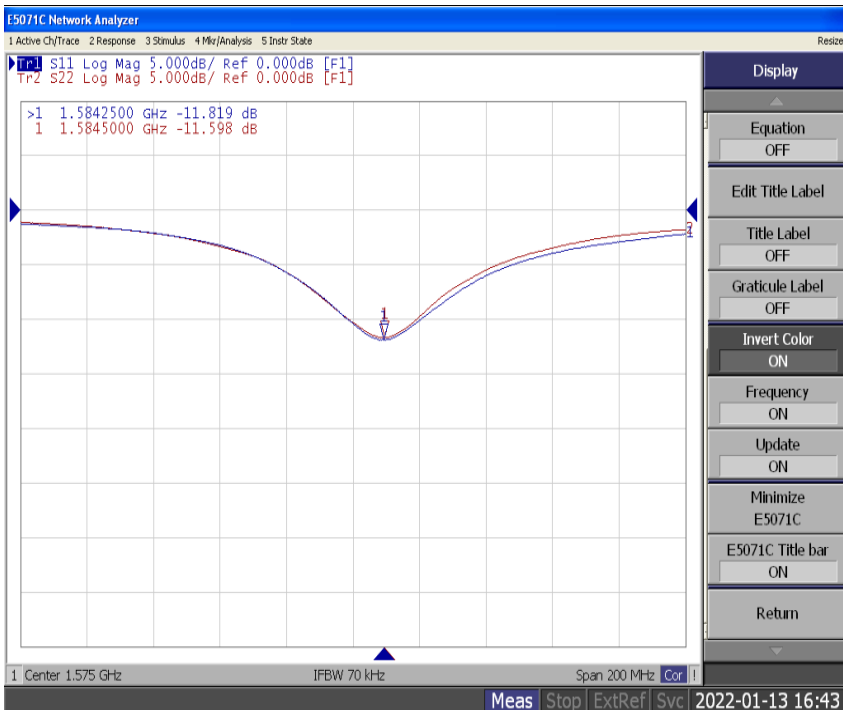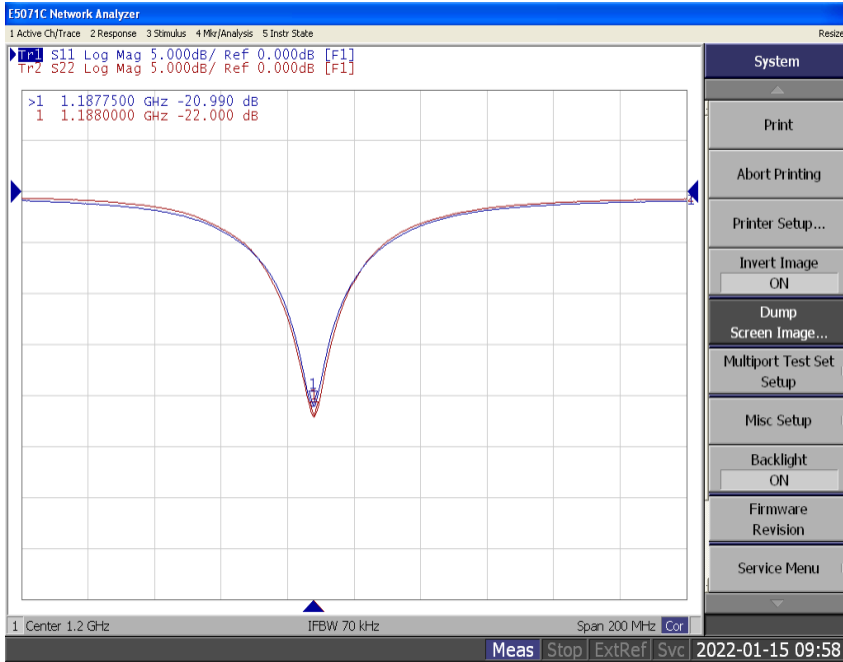

## Mechanical Drawing

