


## Terminal Antenna

- Technology: 4G LTE.
- Easy to install.
- SMA(M) connector, fully customized.
- Applications in cellular terminal stand, networking equipment, broadband modems, CPE, and router etc.



Item	Performance Specifications
Center Frequency	700~960MHz/1710~2170MHz/2300~2700MHz
V.S.W.R	<3.5
Polarization	Vertical LP
GSM/LTE Antenna Gain	2dbi
GSM/LTE Antenna Impedance	50 Ω
Material of Radiator	PCB
Material of Plastic	ABS
Cable Type	RG137, fully customized
Connector Type	SMA Male, fully customized
Connector Pull Test	≥3.0Kg
Operating Temperature	-40°C~+65°C
Storage Temperature	-40°C~+80°C
Relative Humidity	Up to 95%
Environmentally Friendly	ROHS compliant

## Antenna-S Parameter Test Data

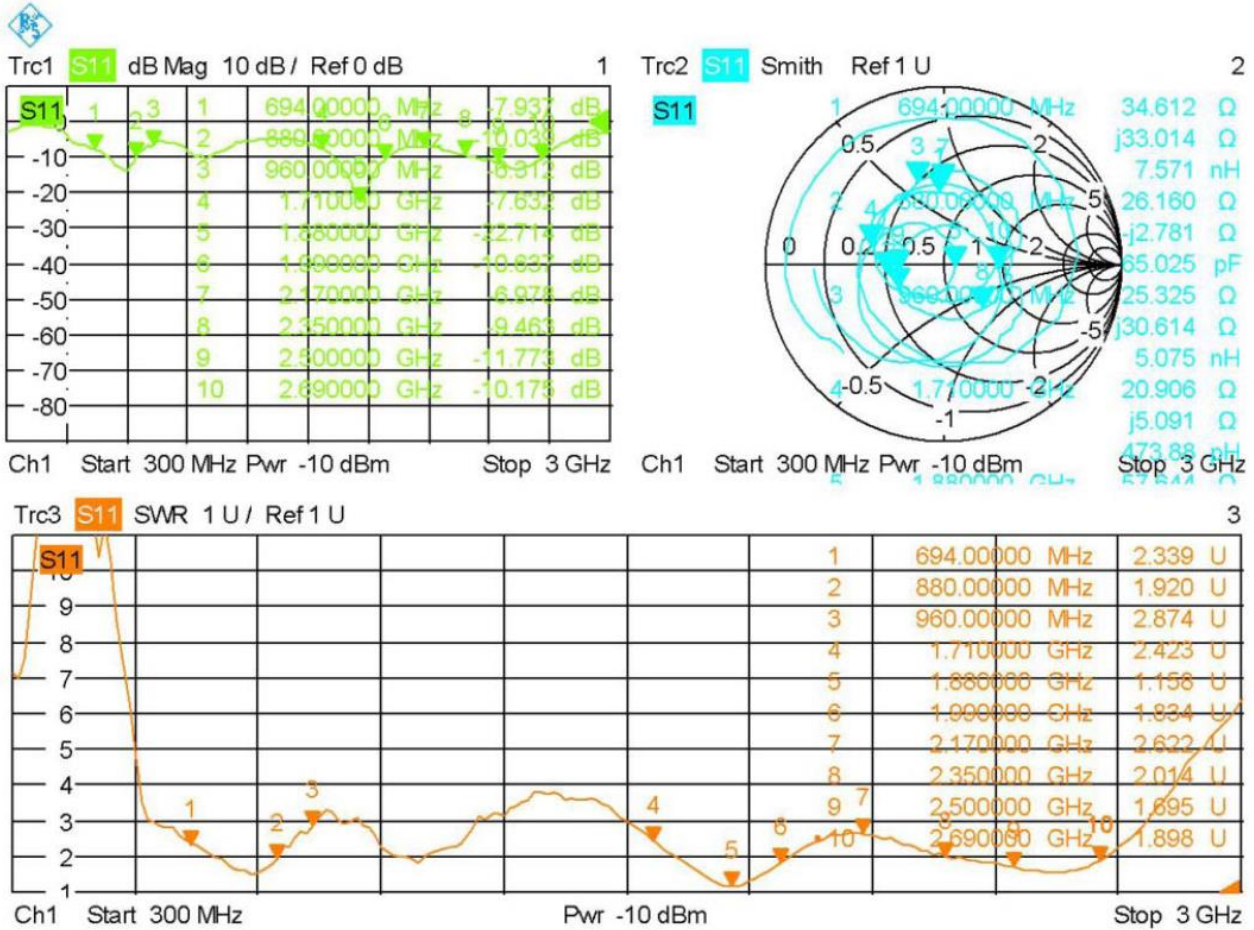

## Antenna Mechanical Drawing

