


Terminal Antenna

- Technology: 4G LTE.
- Easy to install.
- SMA(M) connector, fully customized.
- Applications in cellular terminal stand, networking equipment, broadband modems, CPE, and router etc.



Item	Performance Specifications
GSM/LTE Antenna Center Frequency	700~960MHz/1710~2170MHz/2500-2700MHz
GSM/LTE Antenna V.S.W.R	<2.0
GSM/LTE Antenna Polarization	Vertical LP
GSM/LTE Antenna Gain	2dbi
GSM/LTE Antenna Impedance	50 Ω
Material of Radiator	Cu
Material of Plastic	ABS
Cable Type	RG174, fully customized
Connector Type	SMA Male, fully customized
Connector Pull Test	≥3.0Kg
Operating Temperature	-40°C~+65°C
Storage Temperature	-40°C~+80°C
Relative Humidity	Up to 95%
Environmentally Friendly	ROHS compliant

Antenna-S Parameter Test Data

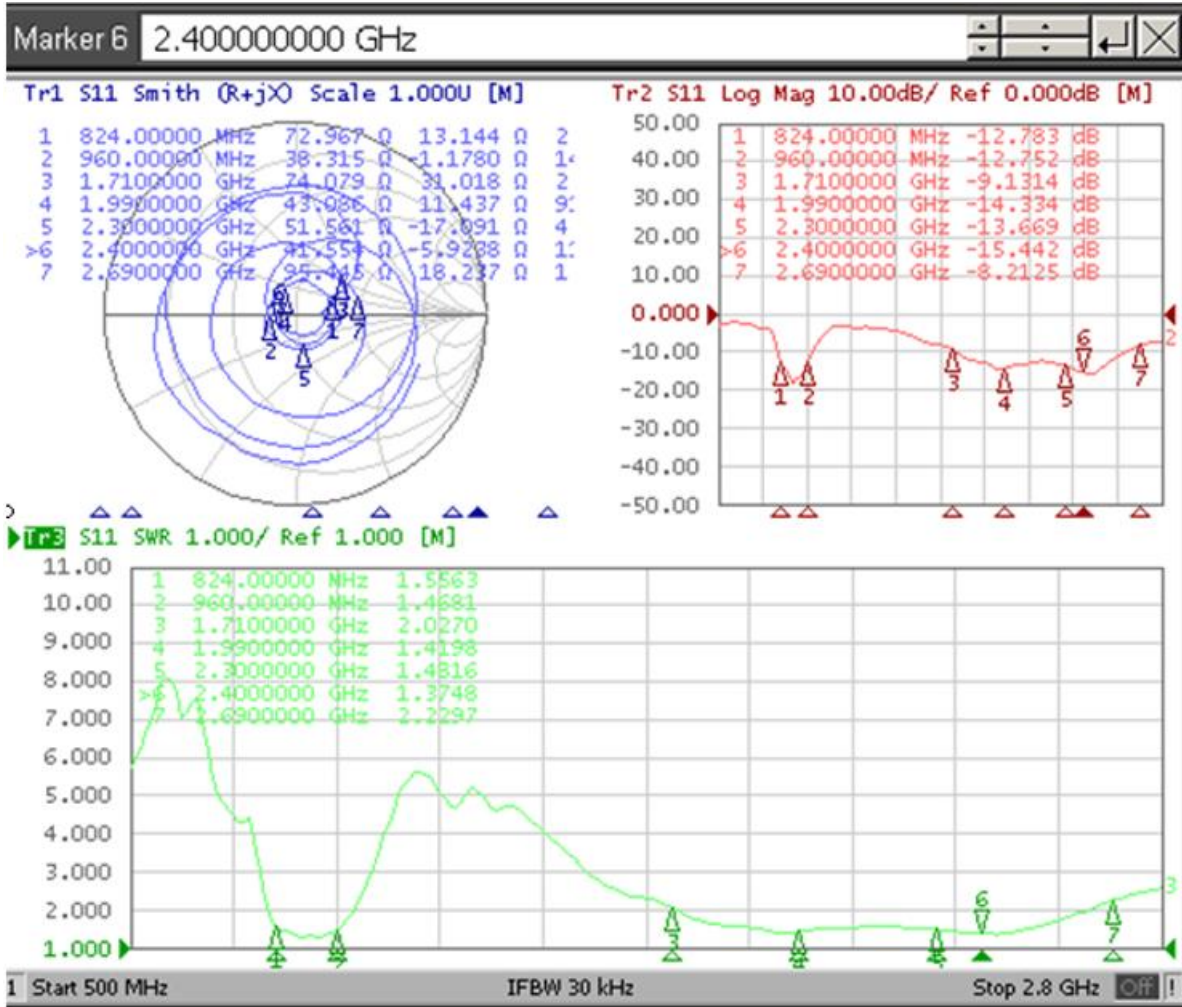

Antenna Mechanical Drawing

